



# Heated Backup Camera System With Color 7" *WATERPROOF* Multi-View LCD Monitor for Indoor & Outdoor Forklifts



KIT P/N: STSK7316

- 7" Waterproof Monitor With Membrane Touchpad
- High Resolution With Ultra Sharp DIGITAL Display & LED-Backlit Panel
- Multi-View LCD Monitor Can Accept Up To 4 Camera Inputs
- Heavy Duty, Heated Camera Provides 120° Field Of Vision
- 6 InfraRed LEDs in Camera Provide Up To 30 Ft. of Night Time Visibility
- Integrated Audio Built-In Camera Mic & Powerful Monitor Speakers
- Versatile Monitor & Camera Mounting Options Designed For Forklifts




90-21 144th Place, Jamaica, New York 11435  
TEL (800) 227-2095 • FAX (718) 297-0323  
Info@Roscomirrors.com  
www.roscomirrors.com www.roscovision.com



### MULTI-VIEW WATERPROOF MONITOR P/N: STSM207 (Included In Kit)

Screen Size (Diagonal)	7"
Maximum No. of Cameras	4 Inputs/Channels
Screen Ratio	16:9
Contrast Ratio	300:1
Video System	NTSC
Voltage Input	12~24 Vdc
Operating Temperature °F (°C)	-22° to 158° (-30° to +70°)
Storage Temperature °F (°C)	-40° to 176° (-40° to +80°)
Dust/Water Rating	IP67
Shock Rating	100g
Vibration Rating	8g
Speaker Impedance	8 Ohms
Weight	1.7 lb
Dimensions W x H x D	7" x 5.75" x 1"
Sun Shade	Included
Brightness	400 cd/m2


Monitor Mounting Options U-Bracket with Specialized / Universal Forklift Mounting Plate

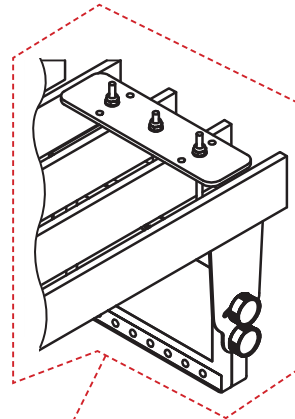

### HEATED CAMERA P/N: STSC107 (Included In Kit)

Image Device	1/3" CCD
Pixels	250,000
TV Lines	380
InfraRed LED's	6 High-Output
Dust/Water Rating	IP67
Field of View	120°
Operating Temperature °F (°C)	-22° to 158° (-30° to +70°)
Storage Temperature °F (°C)	-40° to 176° (-40° to +80°)
Audio	Yes
Heater	Thermostat Controlled
Shock Rating	100g
Vibration Rating	10g
Weight	0.88 lbs.
Dimensions W x H x D	2.7" x 1.7" x 2.2"
Construction	Cast Aluminum Housing w/ Stainless Steel Mounting Bracket & Weather Shield

Camera Mounting Options Comes Complete w/ Universal Forklift Mounting Bracket



**STSC107**  
Standard Camera  
(included in kit)



**Optional Cameras:**  
**STSC117**  
Vertical Tilt Camera  
(camera lens automatically pivots up/down w/ trigger inputs)



**STSC127**  
Shutter Camera  
(camera lens is protected by automatic lens cover)



**STSC128**  
Side Mount Camera  
(universal left or right side mount camera)

### HARNESS P/N: STSH308 (Included In Kit)

16.5' Harness

#### Optional Harnesses:

- STSH307 - 60' Harness
- STSH310 - 60' Harness Extension (used with STSH308)
- STSH306 - 60' Harness (for STSC117 Only)



**STSH308**  
Standard Harness

#### Optional Harnesses:



**STSH307**



**STSH310**



**STSH306**