

MONITOR P/N: STSM241

Screen Size (Diagonal)	5"
Resolution	960(H) x 234(V)
Screen Ratio	4:3
Contrast Ratio	350:1
Voltage Input	10~32 Vdc
Voltage Output	12 Vdc
Max No. of Cameras	2
Viewing Angles Up/Dn/Lt/Rt	15 x 35 x 50 x 50
Button Control	Cam 1/ Cam 2
Shock Rating	100g
Vibration Rating	15g
Color Configuration	RGB Stripe
Operating Temperature °F (C°)	-5° to +150° (-20° to +65°)
Storage Temperature °F (C°)	-13° to 158° (-25° to +70°)
Dimensions WxHxD in (mm)	5.7 x 4.3 x 1 (144 x 110 x 25)
Weight lb. (Kg)	0.8 (0.4)
Other Features	Switch - selectable mirror/normal image, Button - selectable day/night dimming




CAMERA P/N: STSC141

Image Device	Sony 1/4" CCD
Pixels	270,000
TV Lines	420
Video Output	1.0 Vp-p, 75 Ohm
Field of View	120°
Lens Focal Length	2.6mm
Sync System	Internal
Minimum Illumination	0 Lux (Infrared LED's on)
Infrared LED's	18 High-Output
Night Vision Range	30 feet
Dust/Water Rating	IP67
Shock Rating	100g
Vibration Rating	15g
Power Supply	12 Vdc from Monitor
Current	200 mA
Operating Temperature F° (C°)	-15° to +160° (-25° to +70°)
Storage Temperature F° (C°)	-20° to +176° (-30° to +80°)
Dimensions WxHxD in (mm)	3 x 2 x 2 (75 x 48 x 49)
Weight lb. (Kg)	0.6 (0.26)



HARNESS P/N: STSH341

65' Heavy Duty with Twist-lock Connectors

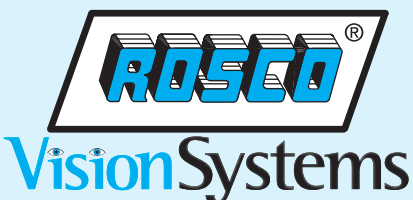

A Century of Automotive Vision Safety

90-21 144th Place
Jamaica, New York 11435
Phone: 718-526-2601
Fax: 718-297-0323
www.roscovision.com
Cat No. 0210