




Heavy Duty Color Backup Camera System With 5" LCD Monitor & Two Camera Inputs for Work Trucks, Vans, Buses, RV's & Trailers

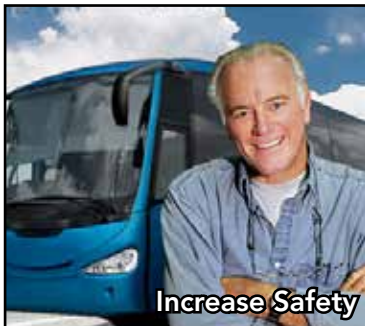

KIT P/N: STSK5833

- Rugged High Resolution 5" LCD Color Monitor With Ultra Sharp Display
- System Can Accept Up to 2 Camera Inputs for Multiple Camera Views
- Rugged Bullet Camera Provides 150° Field Of Vision
- 6 High-Output InfraRed LED's
- Built In Camera Microphone & Powerful Monitor Speakers
- Versatile Mounting On Dashboard or Overhead Location
- One Year Warranty Included

MONITOR P/N: STSM241 (Included In Kit)

Screen Size (Diagonal)	5"
Maximum No. of Cameras	2 Inputs/Channels
Screen Ratio	4:3
Contrast Ratio	350:1
Video System	NTSC
Voltage Input	10~32 Vdc
Operating Temperature °F (C°)	-5° to 150° (-20° to +65°)
Storage Temperature °F (C°)	-13° to 158° (-25° to +70°)
Shock Rating	100G
Vibration Rating	15G
Weight	0.8 lb.
Dimensions W x H x D	5.7" x 4.3" x 1"
Other Features	Switch - selectable mirror/normal image



CAMERA P/N: STSC106 (Included In Kit)

Image Device	Sharp 1/4" CCD
Pixels	512 x 492
TV Lines	420
InfraRed LED's	6 High-Output
Night Vision Range	30 FT
Video Output	1.0 Vp-p, 75 Ohm
Dust/Water Rating	IP69K
Field of View	150°
Operating Temperature °F (°C)	-4°F to 176°F (-20°C to +70°C)
Storage Temperature °F (°C)	-40°F to 176°F (-40°C to +80°C)
Weight	(28.6 lbs.) 0.13 kg
Dimensions W x H x D	1.3 x 1.3 x 1.7 (35mm x 35mm x 44mm)



STSC106
Standard Bullet Camera



STSC141
Standard Mount Camera



STSC109B
Universal L/R Side Camera

STSC112
License Plate Camera

HARNESS P/N: STSH303 (Included In Kit)

33' Heavy Duty w/ Twist - Lock Connectors

Optional Harnesses:

- STSH304** - 16.5' Harness Extension
- STSH341** - 65' Harness
- STSH394** - Heavy Duty Coilcord Quick Disconnect Kit w/ 16.5' Harness



STSH303
Standard Harness

Optional Harnesses:



STSH341



STSH304



STSH394